


Dimension Data

Electromagnetic Clutches GP.SDC Series

**GP.SDC Series
Design 1**

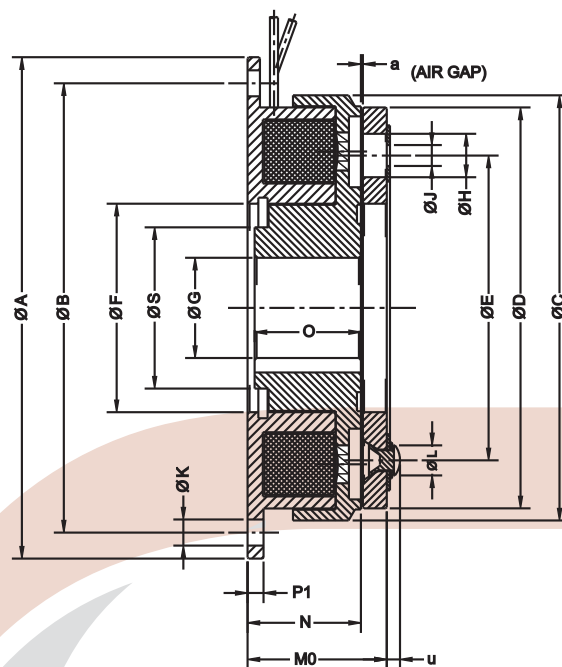


Size	01	02	03	06	10	20	40
Torque in NM	6	12	25	50	100	200	400
Max. Speed (min -1)	7,000	6,000	5,000	4,000	3,000	2,500	2,000
Input Power at 20 °C (Watts)	15	21	29	36	50	69	86
ØAh9	80	100	125	150	190	230	290
ØB	72	90	112	137	175	215	270
ØC	68	85.5	107	134.5	170	214.5	266.5
ØD	63	80	100	125	160	200	250
ØE	46	60	76	95	120	158	210
ØFH8	35	42	52	62	80	100	125
ØGH7	12	15	20	25	30	40	45
ØH	6.3	8	10.5	12	15	18	22
ØJ	3 X 3.1	3 X 4.1	3 X 5.1	3 X 6.1	3 X 8.2	3 X 10.2	4 X 12.2
ØK	4 X 4.5	4 X 5.5	4 X 6.6	4 X 6.6	3 X 9	4 X 9	4 X 11
ØL	3 X 5.5	3 X 7	3 X 9	3 X 10	3 X 13	3 X 16	4 X 20
M ₀	28	31	35.9	40.5	46.5	55.4	63.9
N	24	26.5	30	33.05	37.5	44	51
O	22	24	27	30	34	40	47
P ₁	3.5	4.3	5	5.5	6	7	8
ØS	23	28.5	40	45	62	77	100
T	15	20	25	30	38	48	55
u	1.6	1.8	2.4	2.8	3.2	4	4.3
a	0.2	0.2	0.2	0.3	0.3	0.5	0.5
Max bore ØGH7	17	20	30	40	50	65	80

Dimension Data

Electromagnetic Clutches GP.SDC Series

**GP.SDC Series
Design 2**

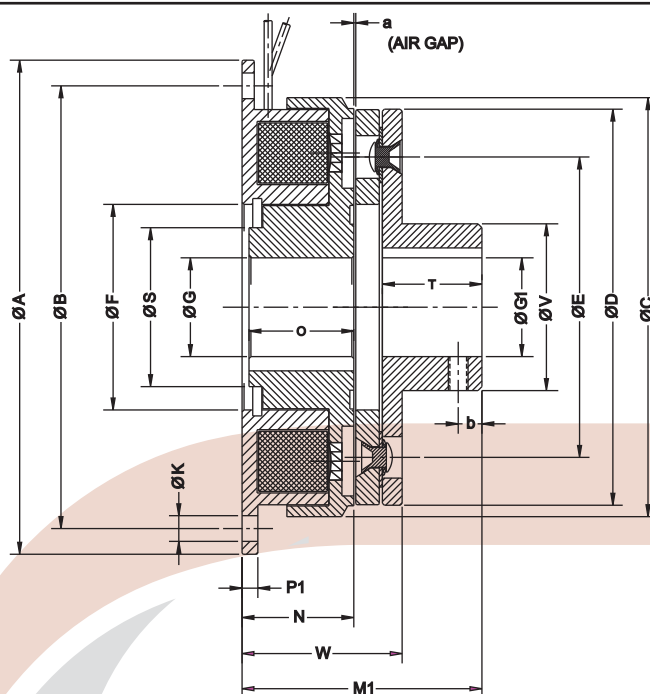


Size	01	02	03	06	10	20	40
Torque in NM	6	12	25	50	100	200	400
Max. Speed (min -1)	7,000	6,000	5,000	4,000	3,000	2,500	2,000
Input Power at 20 °C (Watts)	15	21	29	36	50	69	86
ØAh9	80	100	125	150	190	230	290
ØB	72	90	112	137	175	215	270
ØC	68	85.5	107	134.5	170	214.5	266.5
ØD	63	80	100	125	160	200	250
ØE	46	60	76	95	120	158	210
ØFH8	35	42	52	62	80	100	125
ØGH7	12	15	20	25	30	40	45
ØK	4 X 4.5	4 X 5.5	4 X 6.6	4 X 6.6	3 X 9	4 X 9	4 X 11
M ₁	43	51	60.9	70.5	84.5	103.4	118.9
N	24	26.5	30	33.05	37.5	44	51
O	22	24	27	30	34	40	47
P ₁	3.5	4.3	5	5.5	6	7	8
ØS	23	28.5	40	45	62	77	100
T	15	20	25	30	38	48	55
ØV	28	33	43	50	66	84	106
W	31.5	35	40.9	46.5	53.5	64.4	74.9
a	0.2	0.2	0.2	0.3	0.3	0.5	0.5
b	5	6	6	10	10	15	20
Max bore ØGH7	17	20	30	40	50	65	80
Max bore ØG1H7	17	20	30	35	40	60	80

Dimension Data

Electromagnetic Clutches GP.SDC Series

**GP.SDC Series
Design 3**

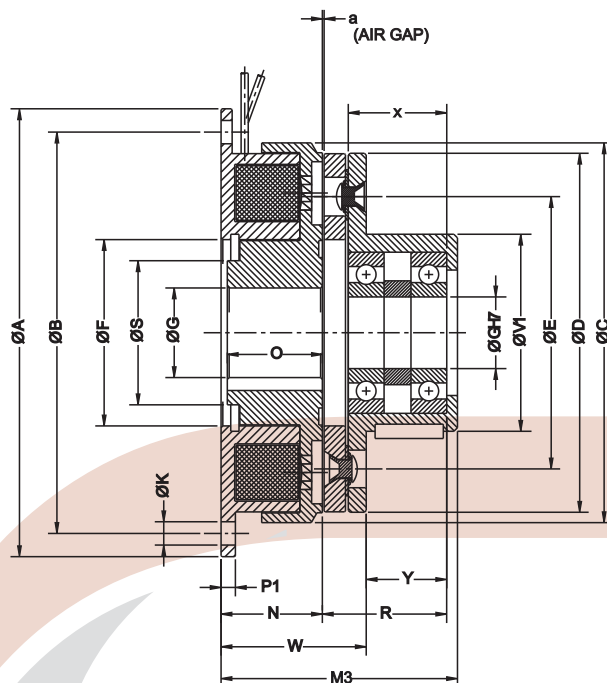

Size		01	02	03	06	10	20	40
Torque in NM		6	12	25	50	100	200	400
Max. Speed (min -1)		7,000	6,000	5,000	4,000	3,000	2,500	2,000
Input Power at 20 °C (W)		15	21	29	36	50	69	86
D I M E N S I O N S	ØAh9	80	100	125	150	190	230	290
	ØB	72	90	112	137	175	215	270
	ØC	68	85.5	107	134.5	170	214.5	266.5
	ØD	63	80	100	125	160	200	250
	ØE	46	60	76	95	120	158	210
	ØFH8	35	42	52	62	80	100	125
	ØGH7	12	15	20	25	30	40	45
	ØK	4 X 4.5	4 X 5.5	4 X 6.6	4 X 6.6	3 X 9	4 X 9	4 X 11
	M ₃	51	60	70.9	86.5	103.5	125.4	144.9
	N	24	26.5	30	33.05	37.5	44	51
	O	22	24	27	30	34	40	47
	R	22	30.5	37.09	50	63	78.4	88.9
	ØS	23	28.5	40	45	62	77	100
	ØV _{3K6}	38	45	55	64	75	90	115
	W	31.5	35	40.9	46.5	53.5	64.4	74.9
	X	20	23.5	30.5	42	54	64	76
	Y	17	22	26.5	36.5	44.5	53.5	64
	a	0.2	0.2	0.2	0.3	0.3	0.5	0.5
	Max bore ØGH7	17	20	30	40	50	65	80
	Max bore ØGH7	17	20	30	35	40	60	80